




Hardware included



Tools needed



Phillips-head screwdriver



Drill with 1/4 in (6 mm) masonry bit (optional)

1.

Remove the protective wrap.




2.

Download the Ring app.







3.

Scan the QR code on your device.



4.


Choose a location near an outlet.

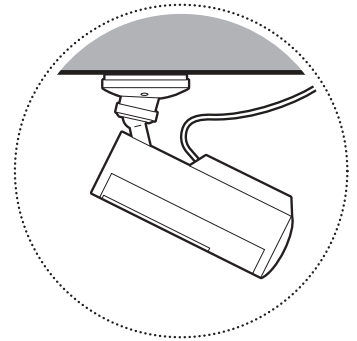

Wall installation


1.

Slide the mounting plate in the direction opposite to the UP arrow to remove.

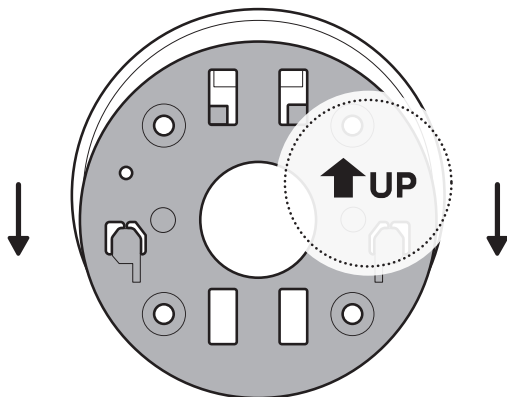


2.

Use the mounting plate as a guide to mark screw holes on the wall with 5.5 in (14 cm) of space in every direction.

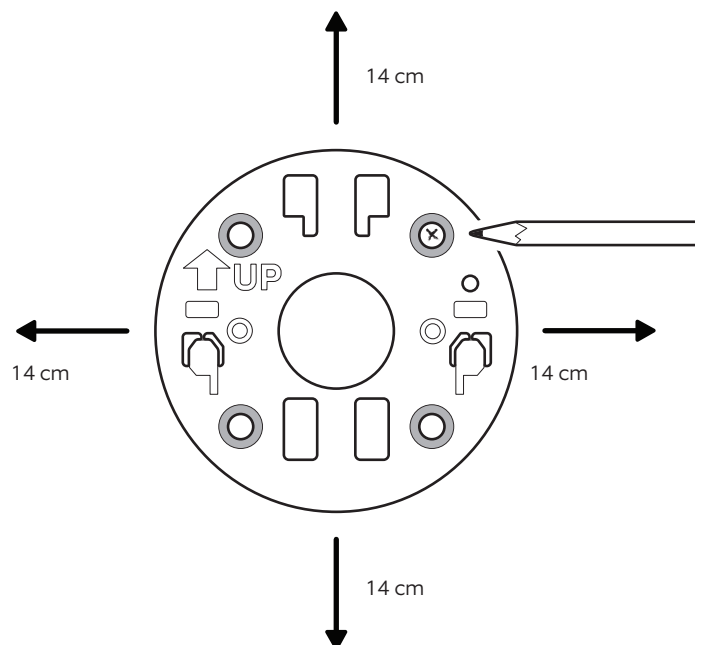


3.

Install the mounting plate with the UP arrow pointing up.

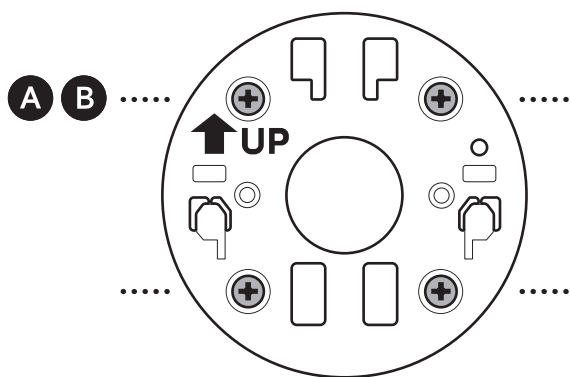


On stucco, brick, or concrete, use a 1/4 in (6 mm) masonry bit to drill holes for the included wall anchors.

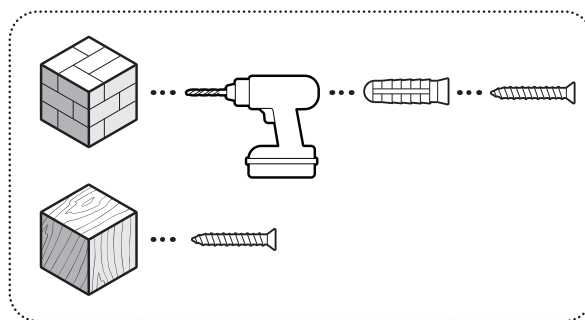


4.

Remove the middle rubber cap on the back of your camera.

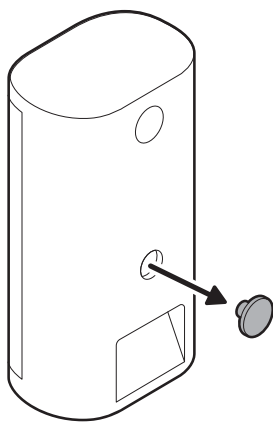


5.

Attach the camera mount to the back of your camera with its screw.

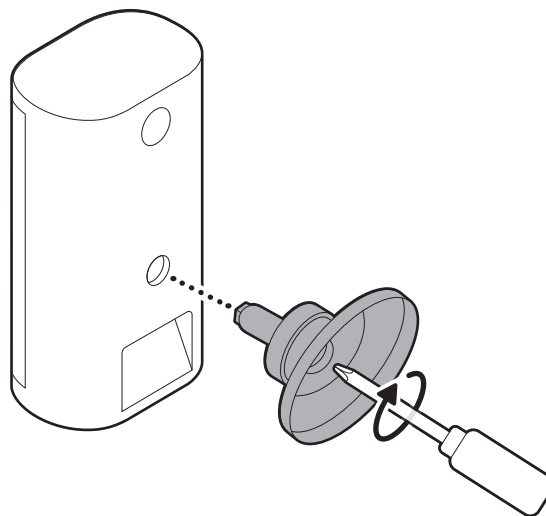


6.

Plug the power cable in until the indicator line disappears.

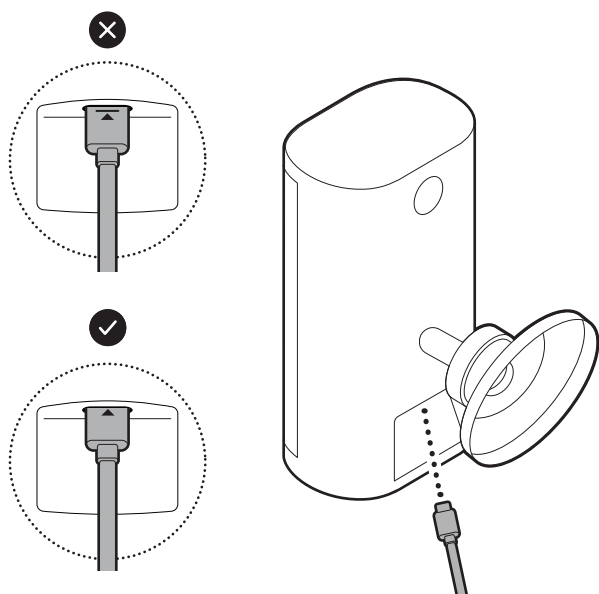


7.

Secure your camera to the mounting plate by sliding until you feel a click.

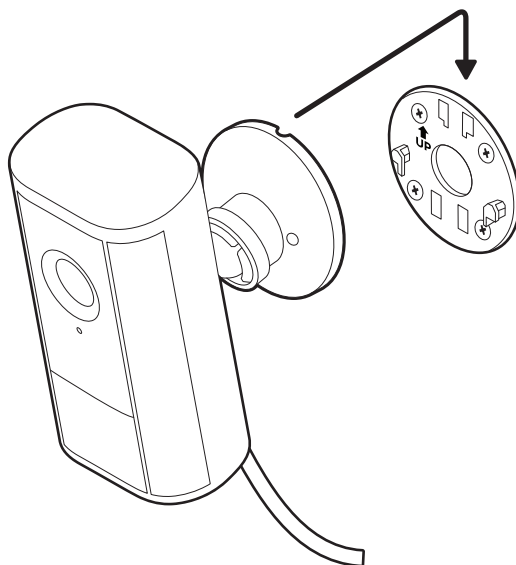


8.

Rotate your camera and tighten the security screw.

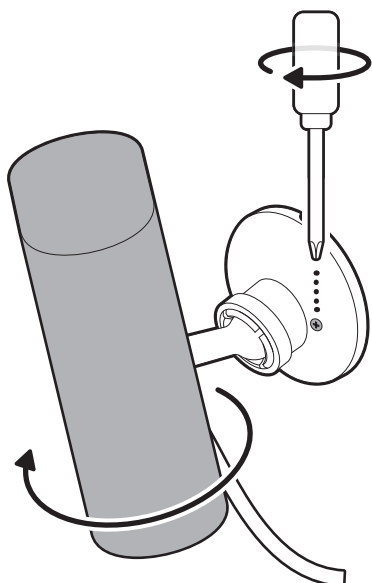


9.

Adjust your camera's position and tighten the ball joint to secure in place.

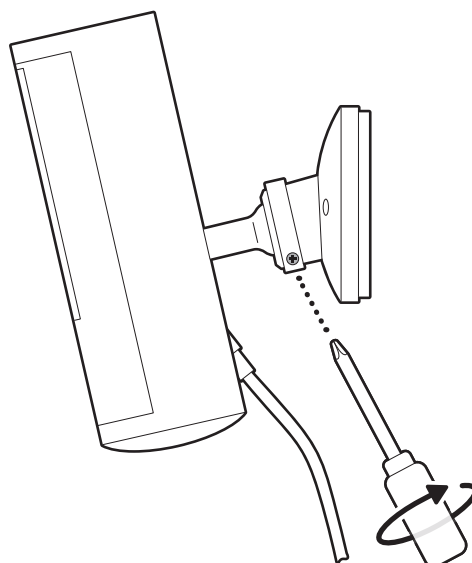


10.

Plug the power adapter into an outlet.

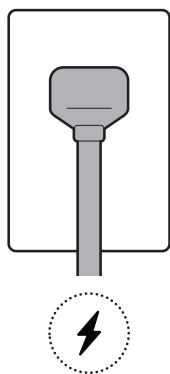


11.

Anchor the power cable to the wall or ceiling with the included cable clips.

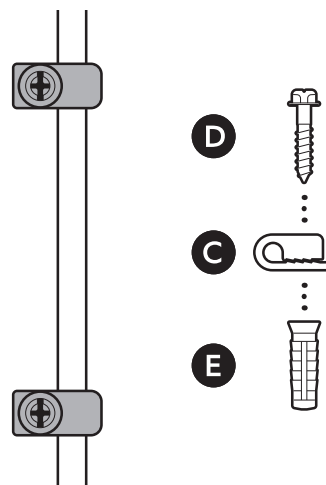


12.

Secure the power adapter with the included anchors and screws.

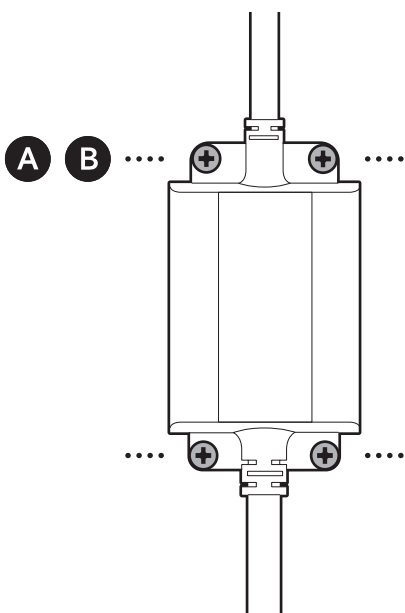


On stucco, brick, or concrete, use a 1/4 in (6 mm) masonry bit to drill holes for the included wall anchors.

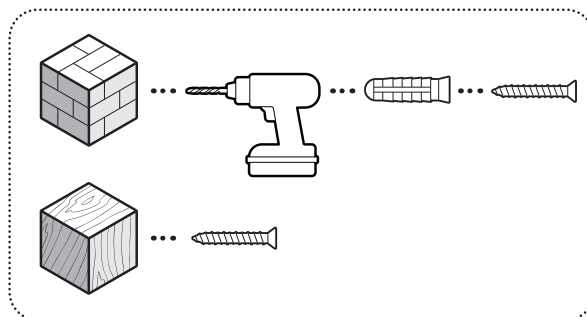

Ceiling installation

1.


Slide the mounting plate in the direction opposite to the UP arrow to remove.

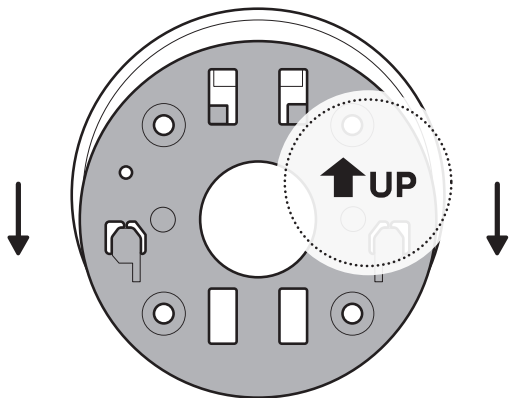

2.


Use the mounting plate as a guide to mark screw holes on the ceiling with 5.5 in (14 cm) of space in every direction.

NOTE: For best results, avoid locations with nearby objects that can interfere with your camera's field of view.

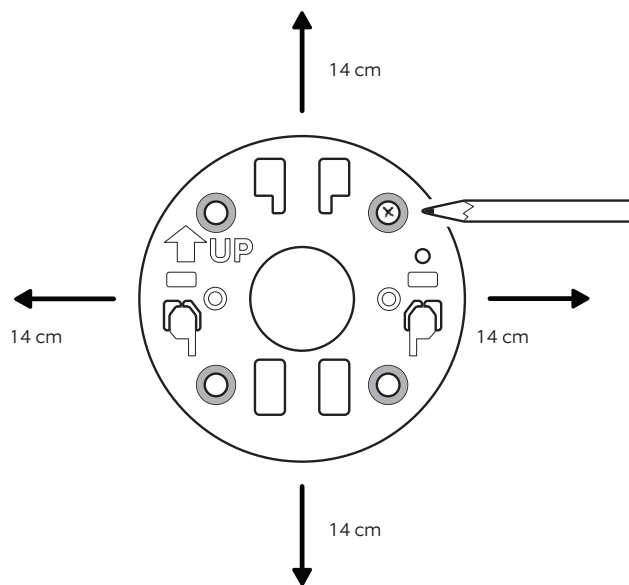


3.

Install the mounting plate with the UP arrow pointing toward your desired viewing direction.

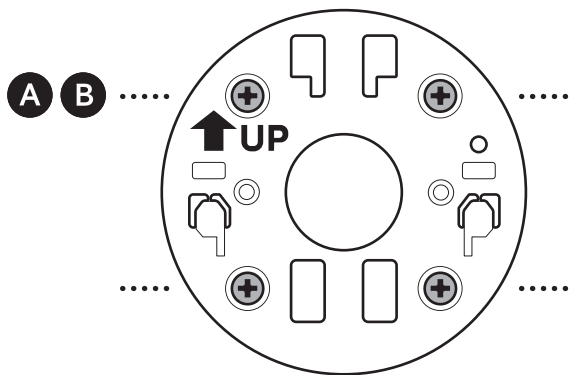


On stucco, brick, or concrete, use a 1/4 in (6 mm) masonry bit to drill holes for the included wall anchors.

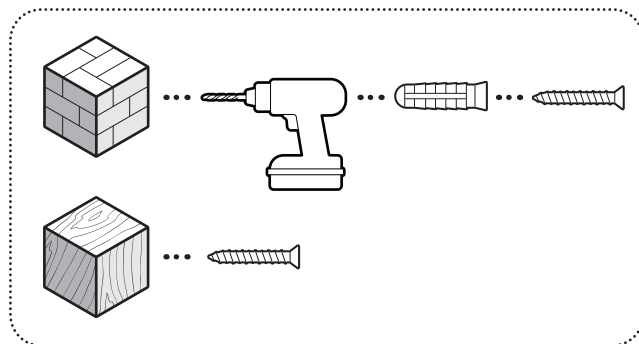


4.

Remove the top rubber cap on the back of your camera.

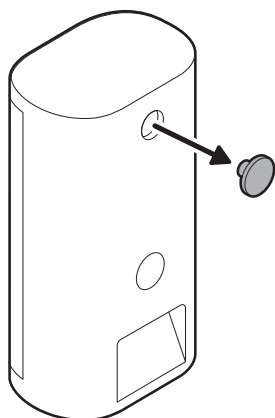

5.


Attach the camera mount to the back of your camera with its screw.

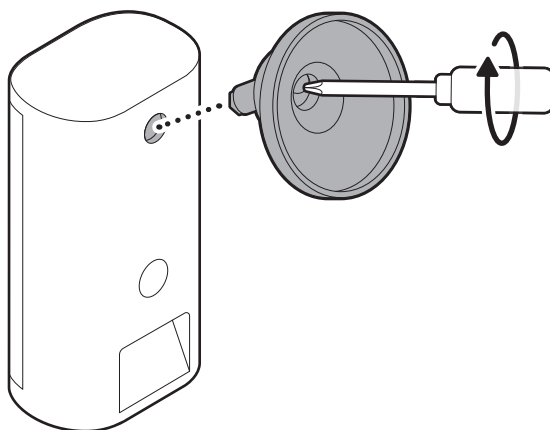

6.


Secure your camera to the mounting plate by sliding until you feel a click.

NOTE: Your camera should be in an upright position.

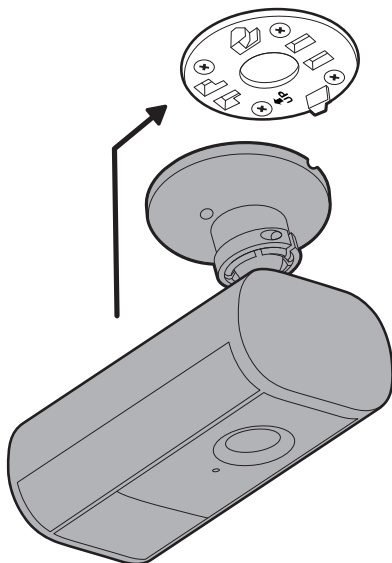


7.

Rotate your camera and tighten the security screw.

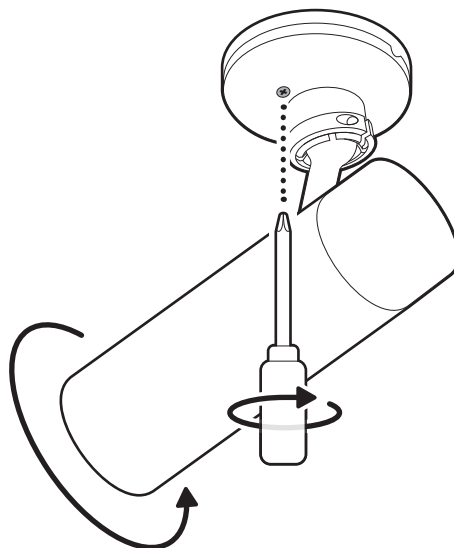


8.

Adjust your camera's position and tighten the ball joint to secure in place.

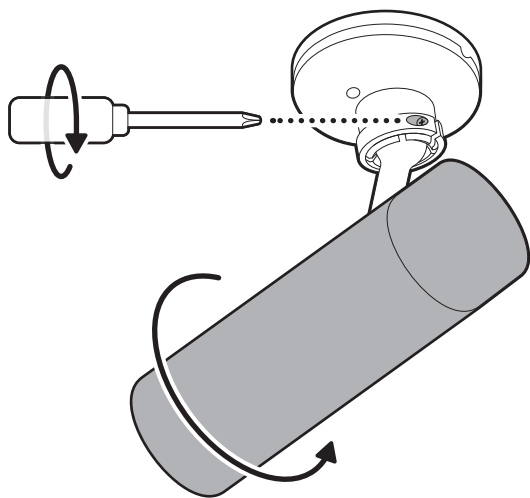


9.

Plug the power cable in until the indicator line disappears.

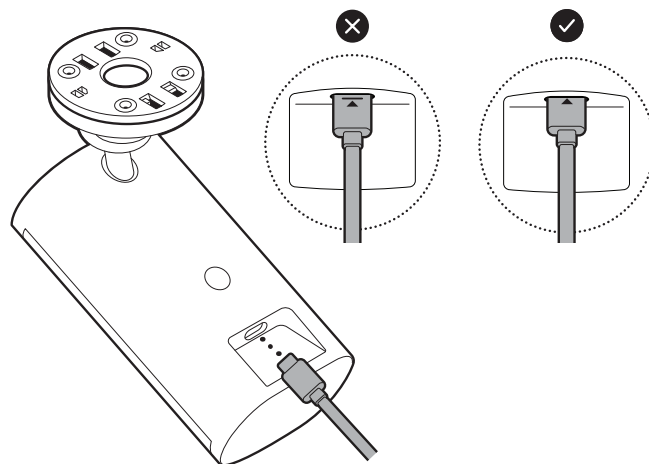


10.

Attach the included cable bracket onto the back of your camera and tighten the handscrew to secure your power cable.

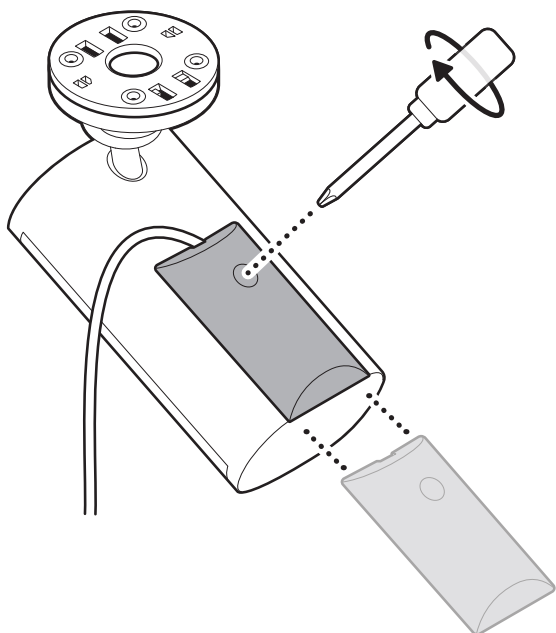


11.

Plug the power adapter into an outlet.

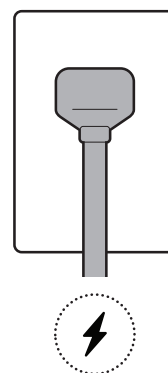


12.

Anchor the power cable to the wall or ceiling with the included cable clips.

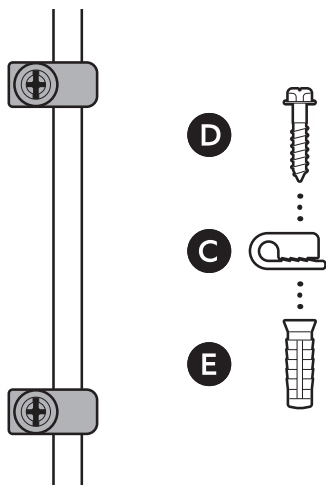


13.

Secure the power adapter with the included anchors and screws.

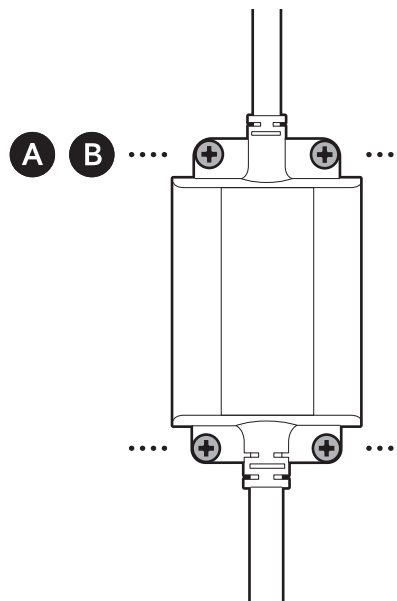

On stucco, brick, or concrete, use a 1/4 in (6 mm) masonry bit to drill holes for the included wall anchors.

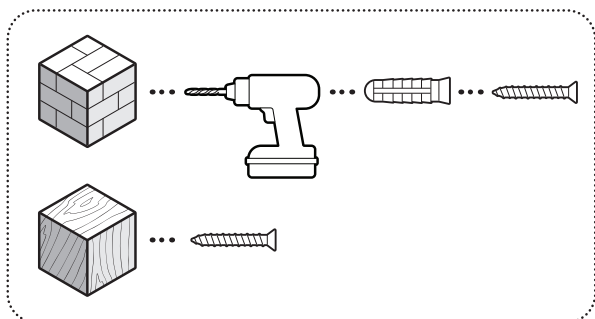

ring.com/contact



ring.com/help

Ring LLC 12515 Cerise Ave, Hawthorne, CA, 90250 USA

Ring LLC / Amazon EU S.à.r.l., 38 Avenue John F. Kennedy, L-1855
Luxembourg / Amazon UK, 1 Principal Place, Worship Street,
London, EC2A 2FA, United Kingdom

アマゾンジャパン合同会社〒153-0064 東京都目黒区下目黒1-8-1

شركة Ring LLC طريق سيريس مينى 12515 مدينة هاونثورن، كاليفورنيا،
الولايات المتحدة الأمريكية. 90250

©2025 Ring LLC or its affiliates. Ring and all related
marks are trademarks of Ring LLC or its affiliates.

©2025 Ring LLC又はその関連会社。Ring及びこれらに関するすべての商標
は、Ring LLC又はその関連会社の商標です。